



Land Solutions

Sea Solutions

Air Solutions



# PotsDOCK 9555

## 9555PD



Voice



RJ11/Pots



Data



GPS



Tracking



# BEAM

# iridium PotsDOCK 9555

## 9555PD

- ▶ **Global Coverage**
- ▶ **Alert Notification**
- ▶ **In-built Tracking GPS**
- ▶ **RJ11/POTS Interface**



**PotsDOCK 9555** is an intelligent compact docking station specifically designed for the Iridium 9555 satellite handset. **PotsDOCK** allows the 9555 handset to be used in a wide variety of applications using an intelligent RJ11/POTS connectivity that supports standard corded, cordless or DECT handsets, or alternatively interfaced with a PBX system.

**PotsDOCK** also has an in-built Bluetooth® module for voice connectivity along with an intelligent tracking and alert reporting system that can be easily configured to support periodic polling or emergency alert reporting.

The cleverly designed **PotsDOCK** cradle simply and securely docks the Iridium 9555 handset into place ready for use and fully integrates antenna, power and data connectivity into a single streamline unit.

The 9555 handset is easily inserted and removed by the press of a button on the top of the dock, making it very easy for use out of the dock at anytime.

**PotsDOCK** also supports the use of an optional compact Beam Privacy Handset that can be located next to the **PotsDOCK** for added convenience if required.



**In-Building**




**Motor Homes /  
Recreational  
Vehicles**



**Cruise Ship /  
Large Vessels**



**Position  
Reporting**

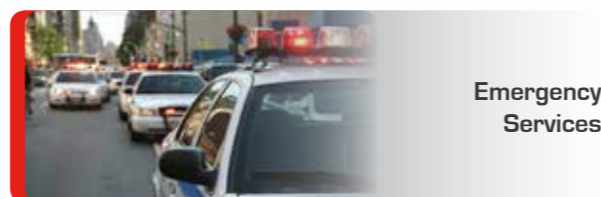

**Emergency  
Services**

## KEY FEATURES

- ▶ **POTS/DOCK 9555 CRADLE**
  - Securely holds 9555 handset
  - Robust design and construction
  - Charges 9555 handset ready for use
  - Integrated antenna connection
  - Integrated USB connectivity
- ▶ **POTS/RJ11**
  - Supports standard cordless & corded telephones (5 REN)
  - RJ11 can be run 600m (2000 ft) from unit
  - Corded, cordless or DECT handsets
  - Easily integrated to PBX system
  - Ring, busy & dial tones
  - Superior voice quality
- ▶ **TRACKING/GPS**
  - Tracking & alert monitoring capable
  - Periodic position reports or remotely polled
  - Triggered position status message
  - In-built GPS engine
  - Also compatible with other tracking applications
- ▶ **PANIC/ALERTS**
  - Panic alert button in-built to cradle
  - Option of additional wired alert buttons
- ▶ **INTEGRATED BLUETOOTH®**
  - Bluetooth® in-built in cradle
  - Supports Bluetooth® voice accessories
- ▶ **IN-BUILT RINGER**
  - In-built ringer for enhanced ring indication
- ▶ **VOICE, DATA, SMS, SBD**
  - Supports all Iridium voice, data, SMS & SBD services
  - Access to prepaid, post paid & crew calling
- ▶ **PRIVACY HANDSET**
  - Supports optional Beam privacy handset
  - Auto sensing answer/hang-up intelligence
- ▶ **INSTALLATION**
  - Supports 9 - 32V DC power input
  - Flexible installation via universal mount, also suitable for wall mounting
  - Supplied with 1 10 - 240V AC Plug pack
  - Handset always charged ready for use
- ▶ **QUALITY**
  - Professional industrial design
  - 2 year peace of mind with a replacement guarantee
  - 100% factory tested
  - Full certified, Iridium, RoHS, CE, IEC60945

## TRACKING / ALERT MONITORING

**PotsDOCK** has an in-built GPS module that can provide simple tracking, monitoring and alert management in various applications within various types of vehicles, vessels or fixed site locations.

The GPS provides pinpoint accuracy and enables tracking worldwide. Tracking and alert messages can be sent via SMS or Short Burst Data, if provisioned on the handset.

**PotsDOCK's tracking and alert messages** can be simply sent via SMS or email address as required.

Tracking messages can be sent from the **PotsDOCK** via the following means;

1. Periodic position reporting, preset during configuration of the terminal
2. Upon an alert being activated via the Alert button on the cradle or connected alert button
3. A current location position can be sent at any time by pressing the Track button on the front of the **PotsDOCK**

Alert/Alarm messages can be activated on the **PotsDOCK** using the two button press on the front of the cradle or alternatively an additional alert button or other trigger can be connected to the unit.

Once configured the alert system is always on and will generate an alert message to the preset destination once triggered. Alerts can be triggered to continually send until the alert is cleared either remotely or locally on the **PotsDOCK** unit.

## EQUIPMENT OVERVIEW



# TECHNICAL SPECIFICATIONS

IRIDIUM NETWORK		
9555 Handset	1616 - 1625 MHz	
Compressed Data	10 - 12 kbps	
Voice/Data Modulation	2.4 kbps	
POWER SPECIFICATIONS		
Power input voltage	9 - 32 V DC, 2A max	
Power Consumption at 12V DC		
Stand-by (when battery charged) - incl handset & RJ11	1.1W (90mA @ 12Vin)	
Transmit - incl handset & RJ11	6W (0.5A @ 12Vin)	
GPS MODULE		
Channels	14 tracking, 51 Channel Acquiring	
Update Rate	1Hz	
Accuracy	Position 2.5mCEP, Velocity 0.1m/s, Timing 300ns	
Acquisition TTFF	Cold 29sec, Hot 1sec	
Sensitivity	-161 dBm	
Operational Limits	Altitude 18000m, Velocity 515m/s	
Dynamics	4G	
PHYSICAL SPECIFICATIONS		
	UNIT ONLY	PACKED
Dimensions - mm	200 x 75 x 65	325 x 140 x 88
Dimensions - inches	7.9 x 3.0 x 2.6	12.8 x 5.5 x 3.5
Weight - kg	0.32	1.3
Weight - lbs	0.7	2.86
ENVIRONMENT SPECIFICATIONS		
Operating Temperature	-30 to +70 °C	-22 to +158 °F
Storage Temperature	-40 to +85 °C	-40 to 185 °F
Humidity	93% non condensing	
I/O ALARM / ALERT		
Alert Button	In-built on PotsDOCK - 2 Key Press	
1 x Alarm Loop	Bare Wire - "Normally Closed" Loop IN to OUT Up to 500m cable run/multi buttons	
Track	Inbuilt - single key press	

CONNECTORS/INTERFACES	
POTS/RJ11	RJ11/2-wire, complex or 600 Ω, 5REN, 600m adjustable dial/busy tones/frequency, adaptive Z
Iridium - Antenna	Fixed Cable to TNC-Female
GPS-Antenna	Fixed Cable to SMA-Female
9-32 V DC	4-way microFit (AC/DC adaptor, or DC lead)
Privacy Handset Port	4 pole 3.5mm jack
Data Port	USB Mini Base of Dock
Bluetooth® Voice only	Inbuilt module/antenna, class 1 (up to 300m) Bluetooth® system 2.0v+EDR, CE and FCC
BUTTONS/LEDs	
Bluetooth®	Blue/Orange
Alert	Red/Orange
Mute/Ringer	Red
Backlight	White LED
Handset Release	Top of Cradle, No LED
CERTIFICATIONS	
Iridium Approved	
Electrical Safety	
EMC Compliance	
CE Compliance	
RoHS	
C Tick	
<b>Independent</b> Aeronautical certification <b>MUST</b> be gained prior installation	
KIT CONTENTS	
Beam PotsDOCK Cradle	
Universal Mounting Bracket (RAM)	
110 - 240V AC Plug Pack	
9 - 32V DC Power Cable	
Quick Start Guide	
User Manual	

## ACCESSORIES

RST702	Dual Mode Iridium/GPS Mast Mount Antenna
RST705	Dual Mode Iridium/GPS Magnetic Mount with 6m of cable
RST710	Iridium Mast Mount Antenna
RST715	Iridium Magnetic Mount incl 5m of cable
RST725	Bluetooth® Headset incl car charger

RST755	Beam Privacy Handset
RST932	6m/18ft Iridium Cable Kit
RST933	12m/36ft Iridium Cable Kit
RST942	6m/18ft GPS Cable
RST923	12m/36ft GPS Cable

APPROVED BEAM RESSELLER



**Remote Satellite Systems**  
INTERNATIONAL

**TOLL FREE 1-888-989-8199**

1455 N. Dutton Suite A, Santa Rosa, CA 95401  
FAX 707-546-8198 • info@remotesatellite.com  
www.remotesatellite.com

www.beamcommunications.com

www.beamcommunications.com



+61 3 8588 4500



+61 3 9560 9055



info@beamcommunications.com

9555PD\_REV02\_04/13

AFRICA

ASIA

AUSTRALIA

EUROPE

MIDDLE EAST

NORTH AMERICA

SOUTH AMERICA