




CONNECT180 Terminal

1.8m Ka-Band Inmarsat Global Xpress Terminal

The CONNECT180 terminal is the largest of the fixed Global Xpress Certified solutions. Combining both optimal performance and functionality, the CONNECT180 provides access to the most advanced IP satellite services. The terminal is ideal for applications demanding very high availability and very high bandwidth and offers the lowest costing airtime of all Global Xpress terminals.

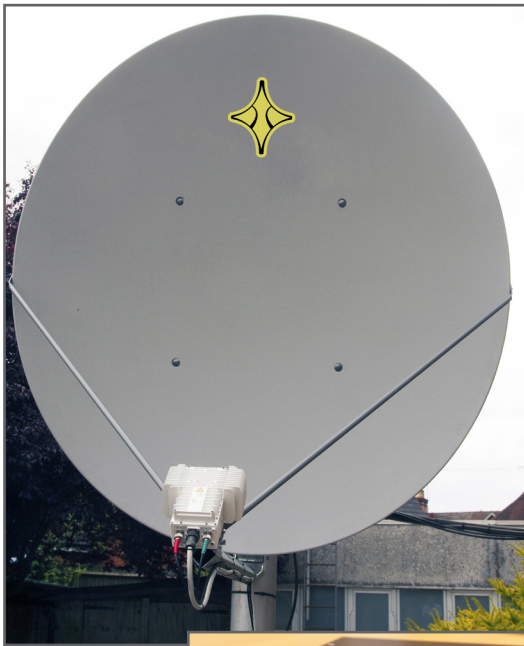

Terminal Overview

Designed for demanding environments, the CONNECT180 offers a variety of features to achieve the required accuracy needed for the best possible GX performance, including the One Touch Calibration function to enable simple RF-chain setup. Paradigm offers the CONNECT180 as a standard terminal, with relevant accessories. Installation manuals and a quick start guide are also supplied on CD-ROM.

Supplied with either a Kingpost, Non-Penetrating Roof Mount or Paradigm ISO Container Mount, the antenna system can be deployed/installed in any location.

Terminal M&C and modem operations are performed by the Indoor Paradigm Interface Module (PIM™), which can optionally be supplied as a Rack Mount unit.

To increase flexibility and adaptability, Paradigm offers alternative interface options to the standard 10/100BaseT, including fibre and wireless solutions. Cable options to suit specific installation environments can also be offered.

Standard Terminal includes:

- 1.8m Antenna with feed
- EI/Az Antenna Mount
- 5W Transceiver / BUC & LNB
- RF Cable (30m)
- Indoor PIM™
- Installation Guide & Operators Manual

Inmarsat Partner for Global Xpress Terminal Manufacturing and Integration

Paradigm is an approved **Inmarsat Global Xpress Terminal Manufacturer**, providing fixed and transportable land terminals in a range of antenna apertures up to 1.8m for commercial and government markets. Paradigm is also an approved **Inmarsat Global Xpress Terminal Integrator**, delivering complex value-added services to meet customers' demands for global coverage, seamless mobility and affordable high-speed broadband connectivity.



CONNECT180

Reflector

Reflector	1.8m Glass Fibre Reinforced Polyester SMC
EIRP	59.5 dBW @ 30.0GHz
G/T	26.1 dB/k @ 20.2GHz, 30°EI, clear skies
Optics	One Piece Offset Feed Prime Focus
Feed	Custom Circular
Mast Pipe Interface	12.7cm (5.0") SCH 40 Pipe 14.1cm (5.56") OD
Mount Geometry	Elevation over Azimuth

Performance

Frequency Range (GHz)	GX Compliant
Polarisation	Circular, RH or LH
External Power	100-230V (50-60Hz)
Power Consumption	< 100W
Ingress Protection	
PIM IDU	IP52
TXVR (BUC/LNB)	IP65
Radiation Pattern Compliance	GX Certified

Ordering Information

CONNECT180 Terminal

Options

Indoor Rack Mount PIM

Outdoor PIM

Mounting Options

NPRM

Kingpost

Paradigm ISO Container Mount

Custom Mounts available on request

Customised & Compatible Fibre & Wireless Solutions available on request

Custom Cable Lengths and Types available on request

Cooling and De-Icing Systems available on request

Mechanical

Azimuth Adjustment	
Fine	360° Continuous; ±10° Adjustment
Elevation Adjustment	
Fine	5° to 90° Continuous
Polarisation	RHCP/LHCP, Manual Change
Packaged Weight	100kgs approx.

Environmental

Wind

Operational	50mph (80km/h)
Survival	125mph (200km/h)

Ambient Operating Temperature

Antenna	-40°C to +55°C
Indoor PIM	0°C to +45°C

Operating Humidity

Indoor PIM	40 to 90% (Condensing)
------------	------------------------



(Our policy is one of continuous improvement: therefore the right is reserved to change specification without notice)

PIM is a trade mark of Paradigm Communication Systems Ltd.

TOLL FREE 1-888-989-8199

1455 N. Dutton Suite A, Santa Rosa, CA 95401
FAX 707-546-8198 • info@remotesatellite.com
www.remotesatellite.com